

Panels

The most attractive welded mesh panel fence available due to its innovative and unique aesthetic appearance in combination with strength and security.

Paladin® Classic

BENEFITS

Prestigious design

Paladin is the most popular Weldmesh panel due to its innovative and aesthetic appearance.

High performance

Strong lightweight construction with high levels of performance against "cut-through" and climbing.

Excellent through vision

Unique mesh pattern provides clear visibility along the fence line.

Maximum height


To achieve fence heights above 2.4m the panels are designed for multi-lift erection i.e. one or more panels are placed above the bottom panel.

$\label{eq:wide-constraints} \begin{tabular}{ll} Wide range of options and applications \\ \end{tabular}$

Available as a complete system for boundary demarcation to general security and anti-intruder fencing.

Applications

Company premises, Public spaces, Schools, Retail, Factories, Airports, Utilities: gas, water, electric & telecommunications

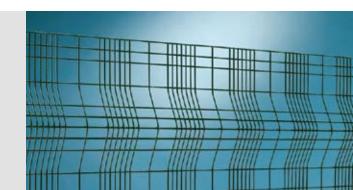

Panels

The panels are 3000mm wide and heights range from 900 to 2400mm. The panels have pressed 'V' beams which contain additional 4mm wires to give increased strength and rigidity. Mesh sizes vary to a maximum 50 x 50mm. Paladin has sophisticated good looks whilst providing a very secure fencing system.

900 - 1800mm panels have 2 'V' beams.

2000 - 2400mm panels have 3 'V' beams.

Posts



Twilfix 2000 post is manufactured from 60x60 square hollow sections and fitted with M8 threaded inserts for securing panels. Wide range of heights available

Posts come inclusive of top caps (flat or pyramid shaped top caps)

Fence Height m	Panel Size Height/Width mm	Number of Beams
0.9	925 x 3025	2
1.2	1240 x 3025	2
1.8	1850 x 3025	2
2.0	2000 x 3025	3
2.4	2440 x 3025	3

Gates

Swing gates available in single and double leaf configuration with a Paladin welded mesh infill to match your fence.

Coating

Panels are manufactured from pre-galvanised wires. An adhesion coating is applied to allow perfect adhesion with the polyester coating (min. 100 micron). Posts are polyester coated with a galvanized substrate in accordance with Euro norm 10147.

Colours

Standard colours are Green RAL6005 and Black RAL9005. Other colours are available on request.

